MS 400 Detector Bases

BOSCH
Invented for life

The detector head is installed in the Detector Base MS 400.
The base is suitable for surface-mounted cable feeds as well as for flush-mounted cable feeds, and has separate attachment points for ceiling mount/flush-mounted back boxes. In addition, it fits all standard bore patterns.
The Detector Base made of white ABS plastic (Novodur, color similar to RAL 9010) has a matt finish and seven terminal screws to connect the detector and its features to the fire panel.
Contacts connected to the terminals guarantee a secure electric connection when the detector module is installed. Cables up to 2.5 mm^2 in diameter can be used.
To protect against unauthorized removal, the detector head can be secured with a variable locking.

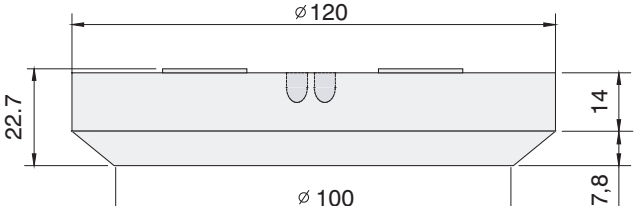

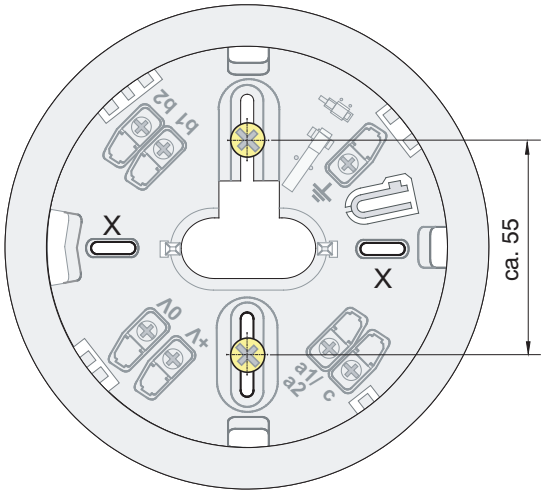

Installation/Configuration Notes

Installation information for 400/420 Series Detector Bases

- The drill holes marked with an "X" may only be used to mount the base to flush-mounted back boxes.
- Keep shielded auxiliary wire as short as possible, and make sure this is insulated.